

# Kodak T-MDE Plate Processor

## Technical Specifications

### T-MDE 860 Plate Processor

Processor type	Thermal processor rated up to 30,000 sqm/year
Processing sections	Developing, washing, gumming, drying
Accredited digital plates	<b>Kodak Capricorn</b> GT Thermal Plates, <b>Kodak Achieve</b> EM Thermal Plates, <b>Kodak Electra</b> XD Thermal Plates, <b>Kodak Trillian</b> SP Thermal Plates <b>Note:</b> Not all plates are available in every region. Recirculation mode not compatible with <b>Electra</b> XD Plates and <b>Kodak 400 xLo</b> Plate Solution
Maximum plate width	850 mm
Minimum plate length	274 mm
Maximum plate length	Unlimited
Gauge range	0.15 - 0.30 mm
Developer temperature range	20°C- 34°C
Developer tank volume	22 liters
Water supply	1 - 6 bar (15 - 87 psi)
Processing speed	0.5 - 1.4 m/min
Electrical power	Single phase, 1W + N + PE 230 V / 1X16 Amps, 50-60 Hz
Power outlet	None
Standard features	Direct-to-drain (reconfigurable to water saving), 2nd brush for negative plates in developer, developer filter in circulation, interface for Kodak's CTP devices, operating panel with dedicated 4x programs, integrated chiller, drip tray, toolbox with first aid spare parts, Remote Enabling System ( <b>Windows</b> Client), WebConnect (Cloud system), Ethernet cable
Optional accessories	Feed table, delivery table, conductivity probe, container level sensor (dev./gum/waste)
Width x length x height (uncrated)	126 x 116 x 101 cm
Weight (uncrated)	235 kg
Weight (crated)	305 kg
Approvals	Complies with CE, UL/cUL, RoHS, CB




**Kodak**


T-MDE Plate Processors

# System Schematics

Side view

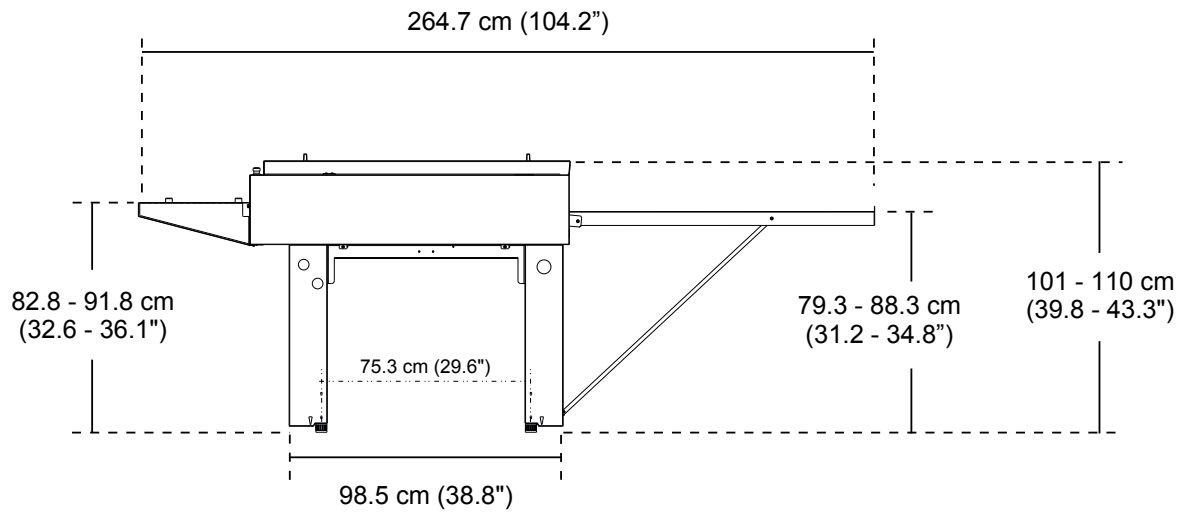

Top view

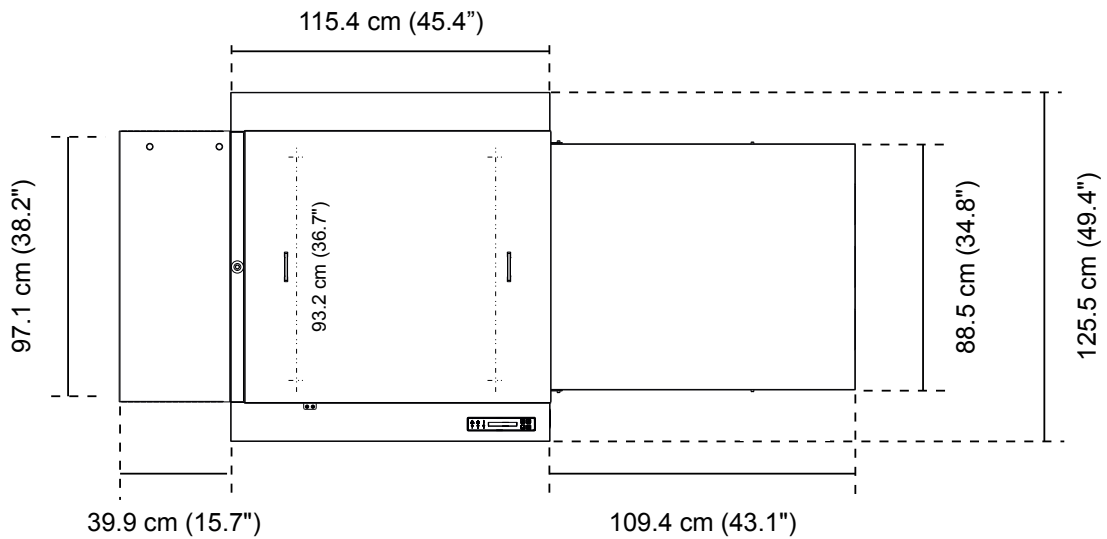

**To learn more about solutions from Kodak:**

Visit [graphics.kodak.com](http://graphics.kodak.com)

Produced using Kodak Technology.

Eastman Kodak Company  
343 State Street  
Rochester, NY 14650 USA

©Kodak, 2014. Kodak, Achieve, Capricorn, Electra and Trillian are trademarks of Kodak.

Subject to technical change without notice.

E.PC.124.0914.en.03

**Kodak**